

E98 RE / Tall Cup



Date	_____
Project	_____
Location	_____

MODEL	ITEM CODE
E98 RE 2grp White	
E98 RE 2grp Black	
Tall Cup E98 RE 2grp Black	



E98 RE is an elegant and versatile machine, that's easy to use, adjust and maintain.

Ergonomic and sturdy, E98 RE is made of steel and aluminium and is equipped with a reliable and high performance fixed-nozzle thermosiphon system able to guarantee an excellent result in the cup.

Available in the 2- and 3-group automatic versions, E98 RE features selection panels with prompt and precise push buttons (the chosen selection is signaled by a LED) and is available in white, black. The wide logo strip on the front of E98 RE is ideal for adding your own personalization.

- Reliable & high-performing thermal system
- Robust and ergonomic
- New button panels with LEDs
- Quick and easy installation and maintenance
- Can be customized


Each A model group features four selections with programmable shot dosing and one continuous delivery/stop push button.

Each S model group features one continuous delivery/stop push button.

Thermal balancing system.



Technical Data

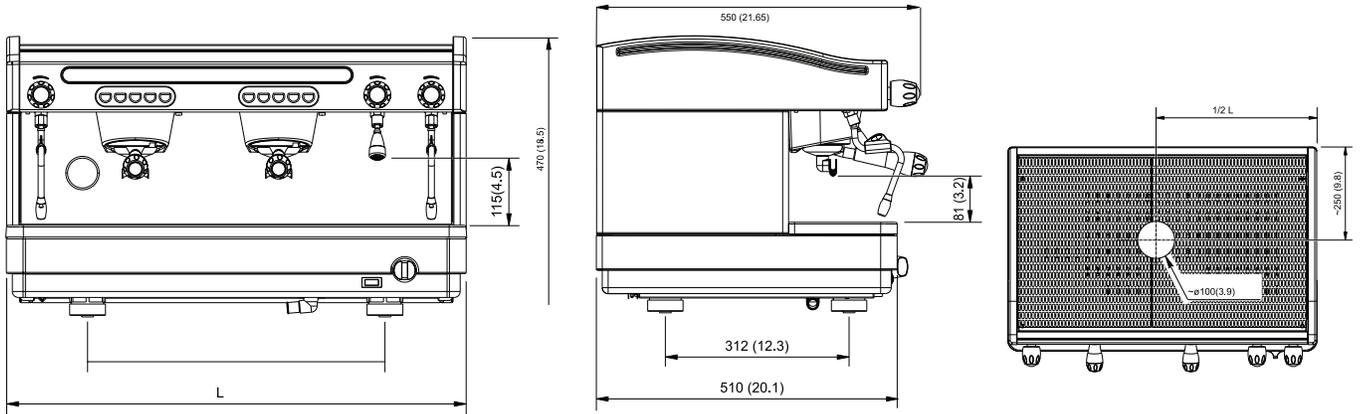

E98 REA2
L1 498 mm
L 770 mm



E98 RE A2

Tall cup version

		A2	A2 TC	A3
Stainless steel multidirectional steam wands		2	2	2
Hot water wand		1	1	1
Boiler Capacity	(l)	11	11	17,5
Max. power at	220-240V 60Hz 1ph (W)	4250-5000	4250-5000	6200-7500
Width x Depth x Height	(mm)	770x510x470	770x510x544	970x510x470
Weight	(kg)	67	67	78
Optional				
Electrical cup warmer kit				

Water & Drain Line Requirements

- Cold Water Line: 3/8" dedicated cold water line with shut-off valve, compression fitting and back flow preventer.
- Water Flow: Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/ 5 Bar. Should flow pressure exceed 70 PSI a pressure reducer is necessary.
- Drain: Open gravity drain of minimum 1.25" ID size for hose, within 4 feet of machine.
- Access Hole: There must be a 2 1/2" access hole underneath the machine to connect the water, drain and power supply.

Receptacle

Customer Must supply outlet to match plug. Receptacle must be a max of 40" from machine.



Euro-Milan reserves the right to modify the characteristics of the products illustrated in this publication without prior notice. For misprints and other errors. There may be colour deviations due to the printing process.

