

iMix iM 38

Spiral kneading machine for pizza, pastry and bakery.

Date	_____
Project	_____
Location	_____



MODEL	ITEM CODE
iM 38	M01-iM38

INTERNAL CONSTRUCTION

Motorization with bath oil motoreducer.
Chain drive.
Rotating transmission parts are assembled on self lubricating ball bearings.
Electrical equipment with low-voltage auxiliary circuit.
Safety device for grille.

OPERATION

Dough homogeneity and oxygenation by the combined rotating movement of the utensil and basin.
The shape of the spiral assures a low and constant temperature of dough during the working.
Possibility to mix maximum 38 Kg in few minutes.

OPTIONS AND ACCESSORIES

(WITH SURCHARGE)

- Two speeds machine
- Two-speed reinforced machine with pinions and double crown gear, plus double chain for special processing ("SP" model)

EXTERNAL CONSTRUCTION

- Structure in powder painted stainless steel.
- Spiral, basin, dough-breaker and safety grille in stainless steel.
- Thick frame to avoid vibrations in every working phase.
- Push-button panel on the right side.
- Machinery on rotating wheels.


STANDARD EQUIPMENT

- Spiral
- Basin
- Dough-breaker
- Rotating wheels
- Timer



Technical Data

iM 38

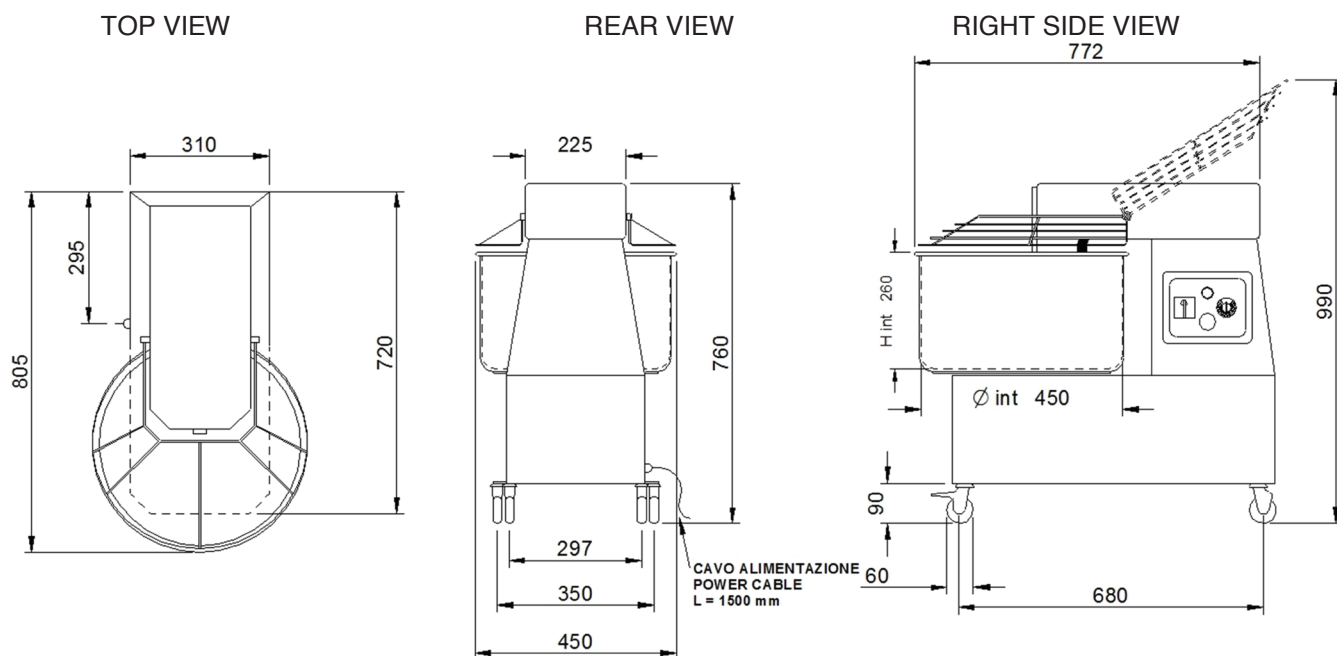

Note: The dimensions indicated in the views are in millimeters

SPECIFICATIONS

Spiral kneading with firm head, ideal for small spaces with rotating wheels. To the construction are used high quality and robustness materials. Thanks to the particular shape of spiral and to the rotating movement of the utensil combined with that of the basin, the spiral kneading, gives possibility to mix in few minutes 38 Kg dough, and assures very good homogeneity and oxygenation. The model assures constant temperature of the dough from beginning to end working, so eliminate the danger of incidental overheating. The transmission system is particularly silent because all parts are assembled on water-tight ball bearings with bath oil motoreducer, free maintenance. The machinery is provided of indispensable safety devices.

TECHNICAL FEATURES

DIMENSIONS

External height	760 mm
External depth	805 mm
External width	450 mm
Weight	105 kg

SHIPMENT INFORMATIONS

Packed machinery:	
Max height	840 mm
Max depth	935 mm
Max width	525 mm
Weight	(105+5)kg


FEEDING AND POWER

<i>Standard feeding</i>
<i>Feeding on request</i>
A.C. V230 3 Power 1.5 kW
A.C. V230 1N Power 1.5 kW
frequency 60 Hz

BASIN CAPACITY

Capacity (dough)	38 kg
Capacity (volume)	40 lt
Basin internal diameter	450 mm
Basin internal height	260 mm
Spiral diameter	22 mm

Two speeds machine not available with V230 1ph



Euro-Milan/ MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice. We accept no liability for misprints and other errors. There may be colour deviations due to the printing process.

