

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity :
AIA #:	SIS # :

Model: **GPZ225A-ETL**

**Pizza prep-table refrigerator**



Electronic controller



Magnetic removable gasket without tools



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procedures.



Plastic pans

**Standard Model Features:**

Is designed with enduring quality that will improve the efficiency and production of your restaurant. Constructed with stainless steel AISI 304 interior & exterior.

**REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly (HCFC free) R452a refrigerant.
- Temperature Range, getting the best in food preservation:
- Coolers adjustable from (28 to 46°F).
- Ventilated - autodefrost -auto evaporation - front -breathing
- Evaporator coil & condenser balanced for low power consumption - holding the widest temperature range in its class.
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design.

**CABINET ARCHITECTURE**

- All made in stainless steel AISI 304
- Higher insulation rates thanks to high-tech environmentally friendly CFC free, Cyclopentane foaming keeping insulation properties longer than other foams. 5% of energy consumption savings guarantee if compared to other CFC free foams.
- No . 6 casters ( 2 with break)
- Power cord and plug supplied
- Electronic digital temperatur controller
- Insulation : Ciclopentane High density foamed in place environmentally friendly.

Kyoto Protocol Compliant:

ODP = 0 (Ozone Depletion Potential)

GWP = 5 (Global Warming Potential) polyurethane keeps energy costs low.

**DOORS**

Nr. 3 doors , gasket of one piece construction, removable without tools for ease of cleaning.

**SHELVING**

Nr.1 Epoxy coated wire shelf standard, installed per full door section 460x660mm (18"x26")

**PANS CONFIGURATION**

Nr. 10 GN1/3 (not included )

**MODEL FEATURES**

- Electronic digital temperatur controller with alarms.
  - Evaporator is epoxy coated to eliminate the potential of corrosion.
  - Unit completely pre-wired at factory and ready for final connection to a dedicated outlet.
- Cord and plug set included: Voltages:  
115V/60Hz/1 phase

**Options and Accessories :**

Upcharge and lead times may apply

- Feet

Specification may change without prior notice

Model	Capacity Lt / ft <sup>3</sup>	Ambient temp. °C/°F	Cabinet / Packing Dimensions			Voltage	Amp	Shipping Weight
GPZ225A-ETL	620 / 21,89	38° / 100,4°	mm / inches			115/60/1	5 + 1,5	450kg/992Lbs
Temp. °C / °F	Door	Absorbed Power W	L	D	H	Plug	"L" Guide	Gas
-2° , 8° C 28° , 46° F	3	400 + 130	224,5 (cm) 88 1/4"	80 (cm) 31 1/2"	147,5(cm) 58 1/16"	NEMA 5-15P	12 pairs	R452A
			237(cm) 93 5/16"	91 (cm) 35 13/16"	131(cm) 51 9/16"			



Model specifications:


Dimensional data	
Capacity	21,89
Width, Overall (in.)	88 1/4
Depth, Overall (in.)	31 1/2
Depth (in.) (doors open 90°)	52 17/32
Height, Overall (in.) (incl. feet or casters)	58 1/16
No. of doors	3
No. of shelves	3
Shelf Area (sq.ft.)	3,26
Max load shelf (lbs)	105
Temp. Range (°F)	28°, 46°
Ambient temp. (°F)	100,4°

Electrical data	
Voltage (int'l)	115V / 60Hz / 1 Ph
Absorbed Power	400/130 W
Amps	5/1,5 A
Cord / Plug	NEMA 5-15P

Refrigerant data	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr) *	3000

Shipping data	
Height - Crated (in)	51 9/16
Width - Crated (in)	93 5/16
Depth - Crated (in)	35 13/16
Weight (lbs)	992

Model Plan Views

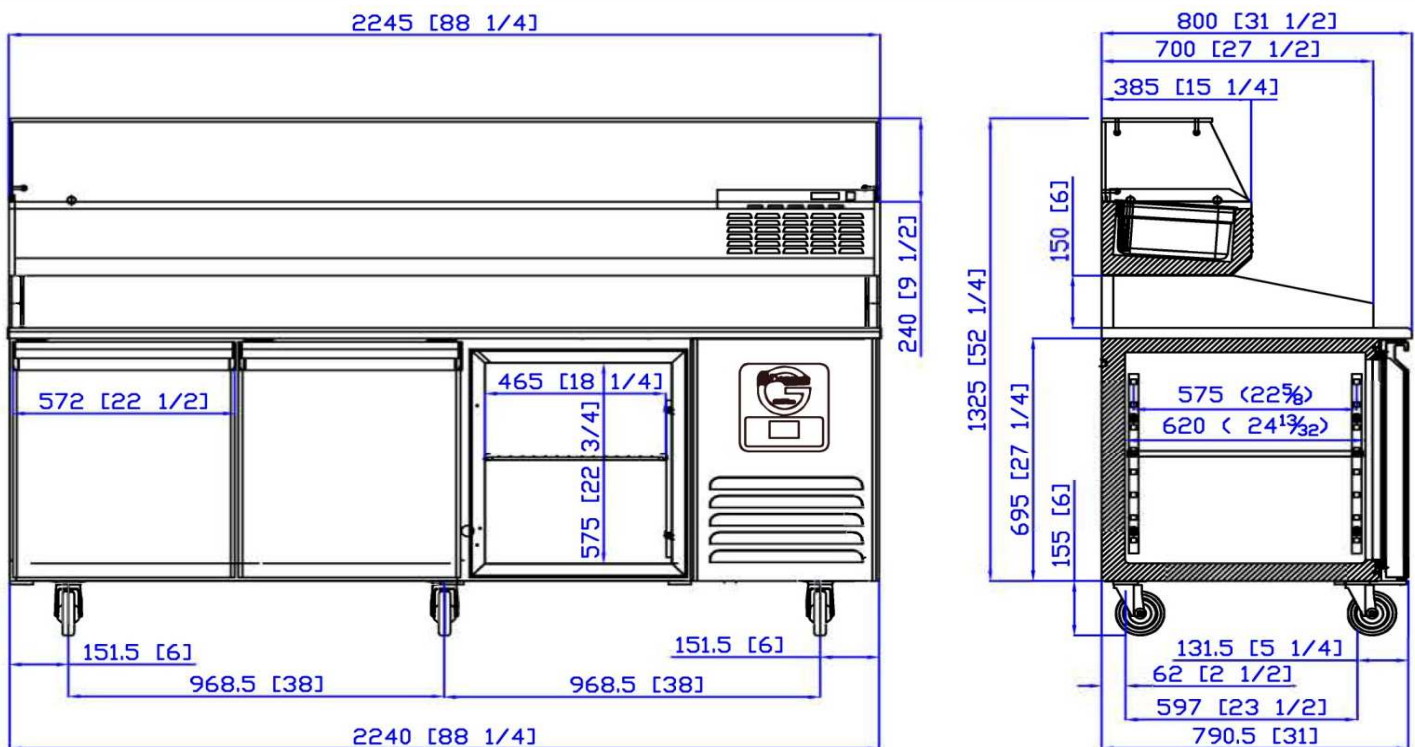

NOT INCLUDED

