

AMALFI - "A2"

MODULAR ELECTRIC OVEN FOR PIZZERIA COMPOSITION WITH 2 BAKING CHAMBER



Date	_
Project	_
Location	-

		MODEL	ITEM CODE
AMALFI K COMP 2/S AMALFI C/18 Z CMP 2/S AMALFI C/18 Z With stand AMALFI S/80 AMALFI S/80 Castors - roues	Ā	cm 102 x 140 x 185 cm 65 x 103 x 18 kW max 14,2	M01-AMALFI-A-2/S
— AMALFI K — AMALFI K — AMALFI COMP 2/SP — AMALFI C/18 Z — AMALFI B AMALFI B AMALFI B		cm 102 x 140 x 185 cm 65 x 103 x 18 kW max 14,2	M01-AMALFI-A-2/SF
	with trayholder slides ort avec glissieres porte plateaux		
AMALFI K AMALFI C/18 Z COMP 2/L AMALFI C/18 Z With prove AMALFI C/18 Z Avec étuve AMALFI L/20 AMALFI L/20 AMALFI L/20 AMALFI L/20	T	cm 102 x 140 x 185 cm 65 x 103 x 18 kW max 15,7	M01-AMALFI-A-2/L
5			

OPTIONS AND ACCESSORIES

(WITH SURCHARGE)

- Proofing cabinet with wheels,
 - height 800 mm (31 1/2")
- ☐ Stand with wheels, height 600 mm (23 5/8")
- ☐ Stand with wheels, height 800 mm (31 1/2")
- ☐ Stand with wheels, height 950 mm (37 3/8")
- Additional tray holder guides for compartment and stand
- ☐ Spacer element height

300 mm (11 13/16")

Suction hood

(WITHOUT SURCHARGE)

☐ Front vapor collection hood in stainless steel

EXTERNAL CONSTRUCTION

- All-around stainless steel body
- ☐ Stainless steel vapours collection hood with aluminised steel top cover
- ☐ Front vapour collection hood in enamelled steel sheet
- ☐ Side panels in pre-painted sheet metal
- Steam duct in stainless steel plate
- ☐ Stainless steel door with bottom hinge and spring balance
- Tempered insulated glass windows
- High quality thermoplastic door and chimney handles
- Electronic control panel

INTERNAL CONSTRUCTION

- ☐ All-around refractory brick baking chamber with internal spiral resistors
- Stainless steel chamber side guards
- ☐ High-density rock wool insulation
- ☐ Internal protected lighting with incandescent lamp
- ☐ Front blade heat saver

OPERATION

- ☐ Electronic control panel with soft-touch buttons
- ☐ Independently regulate ceiling and floor heating elements
- ☐ Maximum temperature reached 450°C (840°F)
- Continuous temperature monitoring with thermocouple
- Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- ☐ Lighting with incandescent lamp
- ☐ Timer
- Economizer
- ☐ Independent maximum temperature safety device








Technical Data

AMALFI "A" 2 CHAMBERS

(assembled with stand height 800)

TOP VIEW

REAR VIEW VIEW FROM RIGHT

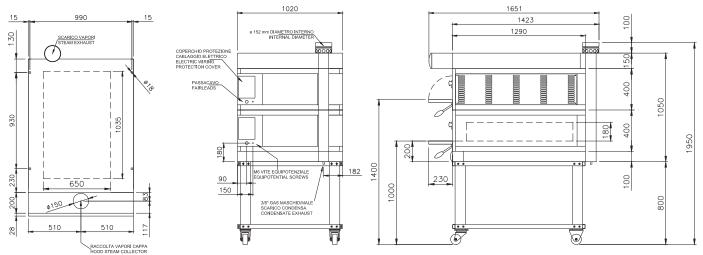

Note: The dimensions indicated in the views are in millimetres.

SPECIFICATIONS

The **Amalfi Type A2** is composed by two (2) independently powered cooking chamber, and a stand or an optional proofing cabinet. The baking chamber entirely built in refractory brick and the heating elements inside the stone, guarantee perfectly even heat distribution throughout the surface, which makes the Amalfi model an ideal deck oven for pizzerias. The oven reaches a maximum temperature of 450°C (840°F). The temperature controls are electronic with independent controls for the ceiling and floor heating elements. The chambers doors are bottom hinged with a wide tempered glass window for constant visual monitoring during the baking process. The stand is composed by a painted metal structure, whereas the proofing cabinet has a stainless steel structure and is fitted with a 65°C (150°F) manual thermostat, internal lighting and slide guides for baking sheets. The proofing cabinet can be used for prepping or as a temporary heated storage, thanks to the doors magnetic fasteners that ensure a secure closure.

All the data provided below refer to the configuration with 2 baking chambers

DIMENSIONS	SHIPPING INFORMATION	POWER SUPPLY
External height 1150 mm (45 1/4") External depth 1651 mm (65") External width 1020 mm (40 1/8") Weight 410 Kg (904 lb) Total baking surface1.4 m² (15 ft²)	Packed in wooden crate Height 1300 mm (51 3/16") Depth 1851 mm (72 7/8") Width 1220 mm (48") Weight 420 Kg (926 lb)	A.C. V240 3ph 60Hz Max power each deck 7.7 kW (18.5 amps) Average consumption/h 3.8 kW (9.2 amps)
	When combined with	Each deck requires separate electrical Connection
TOTAL BAKING CAPACITY Pizza diameter 300 mm (12") 12 Pizza diameter 450 mm (18") 4 Tray(600x400) mm 4 Tray(26"x18") 4	Proofing cabinet or stand: Max height 2250 mm (88 1/2") Max weight 530 Kg (1168 lb)	Proofer feeding A.C.V 240 1ph 60 Hz Max power 1.5kW(7.5 amps) *Average consumption/h 0.8 kWh(3.7 amps)

* This value is subject to variation according to the way in which the equipment is used.

Euro-Milan/ MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice.

We accept no liability for misprints and other errors. There may be colour deviations due to the printing process.



